


F-LSC 114

PRODUCT DESCRIPTION

F-LSC 114-HLFR

Reference suffix ⁽¹⁾ : -HLFR

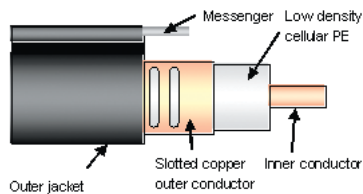


Fire behaviour

Halogen free and flame retardant outer sheath
 Low corrosive gas emission acc. to IEC 60754-2
 Flame retardant acc. to IEC 60332-1 and IEC 60332-3 cat. C
 Low smoke emission acc. to IEC 61034⁽²⁾

F-LSC 114-HLFR/M

Reference suffix ⁽¹⁾ : -HLFR/M

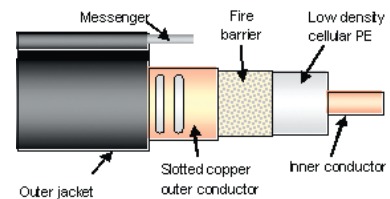

Fire behaviour

Halogen free and flame retardant outer sheath + mica insulated fire barrier tape, under the outer conductor, acc. to IEC 60754-2, 60332-1, 60332-3 cat. C, 61034⁽²⁾, circuit integrity under fire conditions acc. to IEC 60331. Flame temperature = 750°C / voltage = 150 V / flame application = 180 min.

Slots in the copper outer conductor allow a controlled portion of the internal RF energy to be radiated into the surrounding environment. Conversely, a signal transmitted near the cable will couple into the slots and be carried along the cable length.

FEATURES and BENEFITS

- Broadband from 30 MHz to 1.9 GHz
- Robust Cable, with low bending radius
- No Resonant Frequencies
- No Cable Orientation Required
- Main Applications: Tunnel - FM, TETRA, GSM, GSM-R, DCS-1800
- Messenger Wire

TECHNICAL FEATURES

• Size		1-1/4"
• Previous Model Number		532RC8R-HLFR / 532MRC8R-HLFR (with Mica)
• Frequency Range	MHz	30 - 2000
• Recommended for Frequency	MHz	N.A.
• Cable Type		LSC (Leaky Section Cable)
• Jacket		HLFR (Halogen Free Low Smoke Flame Retardant)
• Slot Design		Groups of Slots at longer intervals
• Impedance	Ω	50 +/- 2
• Velocity Ratio	%	88
• Capacitance	pF/m	76
• Inner Conductor dc Resistance	Ω/1000 m (Ω/1000 ft)	0.73 (0.22)
• Outer Conductor dc Resistance	Ω/1000 m (Ω/1000 ft)	1.0 (0.30)
• Inner Conductor Material		Smooth copper tube
• Dielectric Material		Cellular polyethylene
• Outer Conductor Material		Overlapping copper foil, with slot groups, bonded to the jacket



TECHNICAL DATA SHEET

Radiating Cables

Kabelwerk

EUPEN AG

Rev.: 05/2007-10-01

cable

2/2

F-LSC 114

TECHNICAL FEATURES (continued)

• Diameter Inner Conductor	mm (in)	13.0 (0.51)
• Diameter Dielectric	mm (in)	33.5 (1.32)
• Diameter over Jacket	mm (in)	38.0 (1.50)
• Minimum Bending Radius, Single Bend	mm (in)	400 (15.7)
• Cable Weight	kg/m (lb/ft)	0.894 (0.60) HLFMR / 0.918 (0.62) HLFMR/M
• Tensile Strength	daN (lb)	180 (397)
• Indication of Slot Alignment		N.A.
• Storage Temperature	°C (°F)	-70 to +85 (-94 to +185)
• Installation Temperature	°C (°F)	-25 to +60 (-13 to +140)
• Operation Temperature	°C (°F)	-40 to +85 (-40 to +185)
• Material of Messenger		galvanised steel
• Construction of Messenger	mm (in)	7 x 2.3 (7 x 0.09)
• Diameter over Messenger Jacket	mm (in)	12.2 (0.48)
• Maximum Pole Spacing	m (ft)	20 (66)
• Breaking Strength of Messenger	daN (lb)	3780 (8333)
• Longitudinal Loss and Coupling Loss ⁽³⁾		
	Frequency	Longitudinal Loss dB/100 m (dB/100 ft)
		Coupling Loss C50% C95%
	75 MHz	0.76 (0.23) 63 72
	150 MHz	1.13 (0.34) 67 77
	225 MHz	1.44 (0.44) 67 76
	450 MHz	2.22 (0.68) 64 72
	900 MHz	3.69 (1.12) 64 75
	1800 MHz	9.75 (2.97) 58 69
	1900 MHz	11.0 (3.36) 58 69
	2200 MHz	- - -
	2400 MHz	- - -
• Resonant Frequencies	MHz	None
• Clamp Spacing Recommended / Maximum	m (ft)	0.5 (1.64) / 1.20 (3.90)
• Distance to Wall Recommended / Minimum	mm (in)	80 - 180 (3.15 - 7.00) / 50 (1.96)

¹⁾ Must be specified in case of order - standard PE jacket available on request.

²⁾ The smoke density test is performed, based on the IEC 61034. Considering the usual application of radiating cables, the test is done with one sample (>7/8")

³⁾ Measured in tunnel according to **IEC 61196-4 - Ground Level Method.**

Distance = 2m. C50 & (C95) are the average coupling losses with 50% (95%) probability calculated in accordance with the standard.

The above stated values are nominal values and subject to manufacturing tolerance.

As with any radiating cable, the performance in building or tunnel may deviate from figures measured according to the IEC 61196-4 standard.

Coupling loss measurements taken in accordance with IEC 61196-4 - Free Space Method are available on request