


RMC 12-CL

PRODUCT DESCRIPTION

RMC 12-CL-HLFR

Reference suffix ⁽¹⁾ : -HLFR

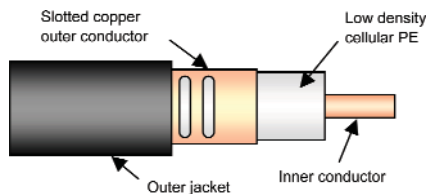

Fire behaviour

- Halogen free and flame retardant outer sheath
- Low corrosive gas emission acc. to IEC 60754-2
- Flame retardant acc. to IEC 60332-1 and IEC 60332-3 cat. C
- Low smoke emission acc. to IEC 61034

Slots in the copper outer conductor allow a controlled portion of the internal RF energy to be radiated into the surrounding environment. Conversely, a signal transmitted near the cable will couple into the slots and be carried along the cable length.

FEATURES and BENEFITS

- Low Fading at short Aerial to Cable distance
- Robust Cable
- Main Applications: WLAN controlled Transportation Systems
- Optimised for WLAN applications in the 2.40 - 2.485 GHz band

TECHNICAL FEATURES

• Size		1/2"
• Previous Model Number		N.A.
• Frequency Range	MHz	2000 - 2900
• Recommended for Frequency	MHz	2400 - 2485
• Cable Type		RMC (Radiated Mode Cable)
• Jacket		HLFR (Halogen Free Low Smoke Flame Retardant)
• Slot Design		Groups of Slots at short intervals
• Impedance	Ω	50 +/- 3
• Velocity Ratio	%	88
• Capacitance	pF/m	76
• Inner Conductor dc Resistance	$\Omega/1000\text{ m } (\Omega/1000\text{ ft})$	1.48 (0.45)
• Outer Conductor dc Resistance	$\Omega/1000\text{ m } (\Omega/1000\text{ ft})$	2.8 (0.85)
• Inner Conductor Material		Copper clad aluminium wire
• Dielectric Material		Cellular polyethylene
• Outer Conductor Material		Overlapping copper foil, with slot groups, bonded to the jacket



RMC 12-CL

TECHNICAL FEATURES (continued)

• Diameter Inner Conductor	mm (in)	4.8 (0.19)		
• Diameter Dielectric	mm (in)	12.4 (0.49)		
• Diameter over Jacket	mm (in)	15.5 (0.61)		
• Minimum Bending Radius, Single Bend	mm (in)	200 (7.87)		
• Cable Weight	kg/m (lb/ft)	0.232 (0.16)	HLFR	
• Tensile Strength	daN (lb)	110 (243)		
• Indication of Slot Alignment		Sheath marking		
• Storage Temperature	°C (°F)	-70 to +85 (-94 to +185)		
• Installation Temperature	°C (°F)	-25 to +60 (-13 to +140)		
• Operation Temperature	°C (°F)	-40 to +85 (-40 to +185)		
• Longitudinal Loss and Coupling Loss ⁽²⁾				
	Frequency	Longitudinal Loss	Coupling Loss	
		dB/100 m (dB/100 ft)	C50%	C95%
	75 MHz	1.87 (0.57)	54	66
	150 MHz	2.75 (0.83)	64	75
	225 MHz	3.42 (1.04)	62	66
	450 MHz	4.96 (1.51)	65	69
	900 MHz	7.32 (2.22)	63	73
	1800 MHz	11.94 (3.63)	59	67
	1900 MHz	12.45 (3.78)	59	67
	2200 MHz	13.90 (4.22)	58	67
	2400 MHz	14.71 (4.47)	54	60
• Resonant Frequencies	MHz	156, 469, 781, 1094, 1406, 1718, 2031, 2344, 2656		
• Clamp Spacing Recommended / Maximum	m (ft)	0.5 (1.64) / 1.20 (3.90)		
• Distance to Wall Recommended / Minimum	mm (in)	80 - 180 (3.15 - 7.00) / 50 (1.96)		

¹⁾ Must be specified in case of order - standard PE jacket available on request.

²⁾ Measured in tunnel according to IEC 61196-4 - Ground Level Method.

Distance = 2m. C50 & (C95) are the average coupling losses with 50% (95%) probability calculated in accordance with the standard.

The above stated values are nominal values and subject to manufacturing tolerance.

As with any radiating cable, the performance in building or tunnel may deviate from figures measured according to the IEC 61196-4 standard.

Coupling loss measurements taken in accordance with IEC 61196-4 - Free Space Method are available on request