



TECHNICAL DATA SHEET

Passive Components


Kabelwerk | **EUPEN** AG

Rev.: 00/2005-08-18

cable

EPC-FA Fixed Attenuators 25 Watt

• Attenuation Value	dB	2	3	4	5	6	9	10	20	30
• Part Number N-Type F/F		EPC FA-A 25 035	EPC FA-A 25 036	EPC FA-A 25 037	EPC FA-A 25 038	EPC FA-A 25 039	EPC FA-A 25 040	EPC FA-A 25 041	EPC FA-A 25 042	EPC FA-A 25 043
• Part Number 7/16 DIN F/F		EPC FA-A 25 044	EPC FA-A 25 045	EPC FA-A 25 046	EPC FA-A 25 047	EPC FA-A 25 048	EPC FA-A 25 049	EPC FA-A 25 050	EPC FA-A 25 051	EPC FA-A 25 052
• Part Number 7/16 DIN F/F		EPC FA-A 25 053	EPC FA-A 25 054	EPC FA-A 25 055	EPC FA-A 25 056	EPC FA-A 25 057	EPC FA-A 25 058	EPC FA-A 25 059	EPC FA-A 25 060	EPC FA-A 25 061
• Part Number 7/16 DIN F/F		EPC FA-A 25 062	EPC FA-A 25 063	EPC FA-A 25 064	EPC FA-A 25 065	EPC FA-A 25 066	EPC FA-A 25 067	EPC FA-A 25 068	EPC FA-A 25 069	EPC FA-A 25 070
• Attenuation Accuracy	dB	± 0.5								
• Return Loss	dB	18								
• Frequency Range	MHz	DC to 2500 MHz								
• Impedance	Ω	50								
• Operating Temperature Range	°C	-20 to +55								
• Weigth N-Type	kg	0.402								
• Weigth 7/16 DIN	kg	0.493								
• Finish		Matt Black Anodised								

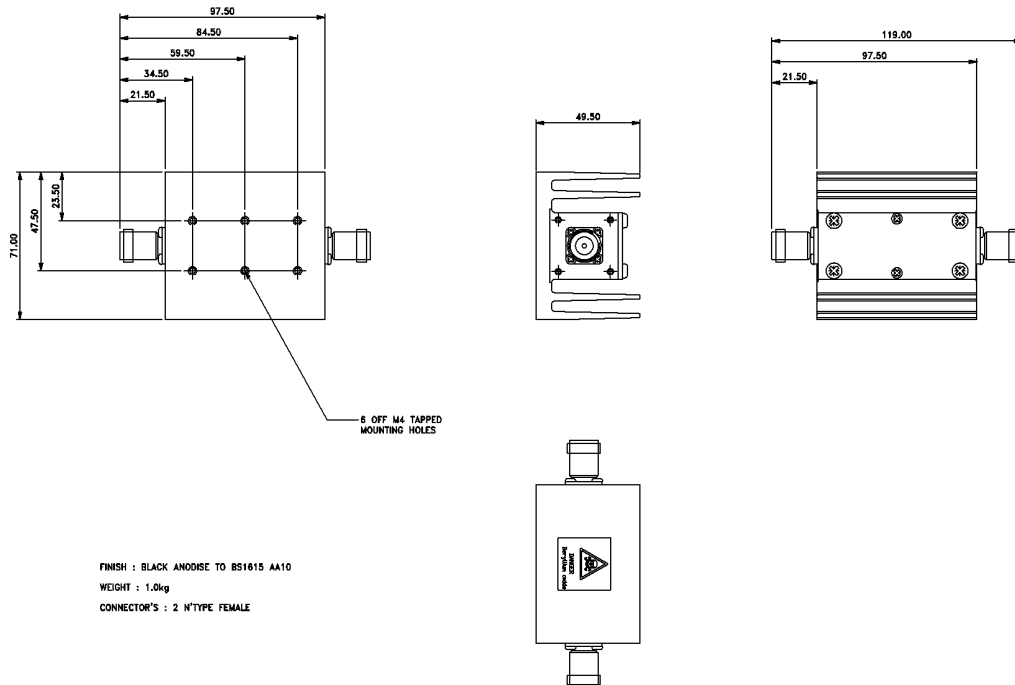

All measurements in mm